
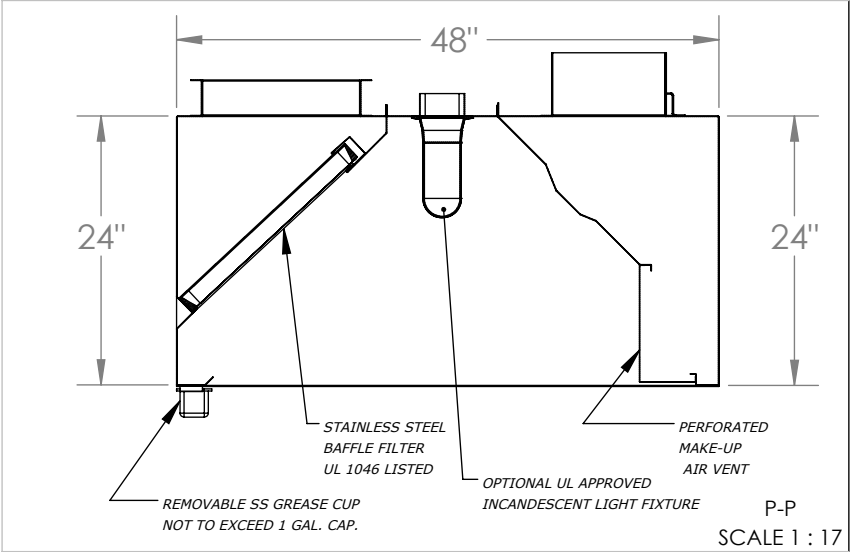
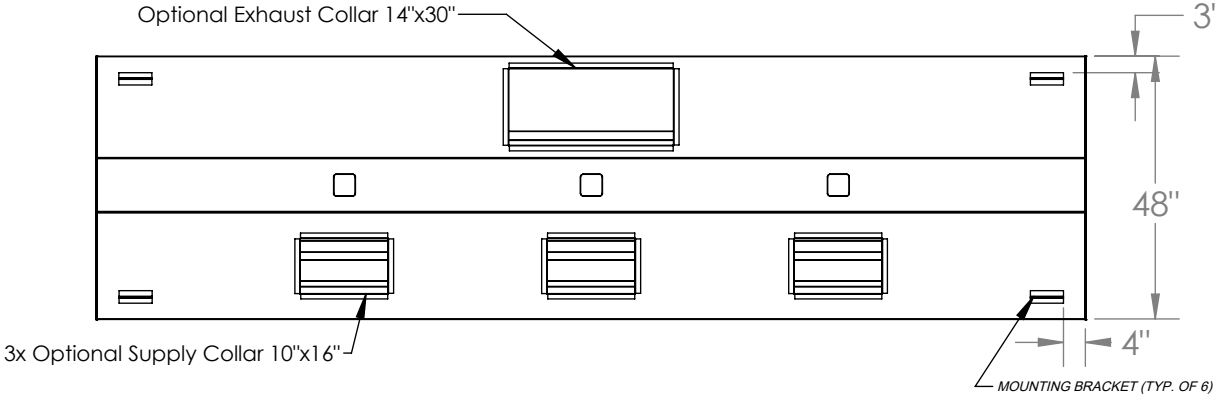


# BSSM48-15

## STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

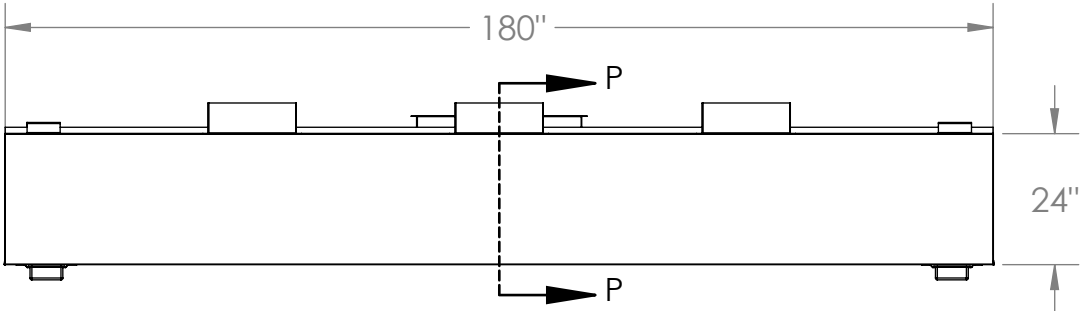



| MODEL INFORMATION |            |       |        |                |                 |         |
|-------------------|------------|-------|--------|----------------|-----------------|---------|
| TYPE              | DIMENSIONS |       |        | CFM SPECS      |                 | WEIGHT  |
|                   | LENGTH     | WIDTH | HEIGHT | EXHAUST PLENUM | SUPPLY PLENUM   |         |
| 1                 | 180"       | 48"   | 24"    | 4532 @ 0.5 ESP | 3626 @ 0.12 ESP | 470 lbs |

OBS.: Installing contractor have the responsibility to ensure hood clearance from limited-combustible and combustible materials is compliant with local code requirements.

| STANDARD COMPONENTS                     |                 |                                   |   |        |        |
|---|-----------------|-----------------------------------|---|--------|--------|
| MOUNTING BRACKET<br>12-GAUGE GALVANIZED | Grease<br>Drain | Grease Cup<br>Stainless Steel NSF | Grease Filter<br>Stainless Steel<br>UL 1046 |        |        |
| QTY                                     | QTY             | QTY                               | QTY   | Length | Height |
| 6                                       | 2               | 2                                 | 0   | 16"    | 20"    |
|   |                 |                                   | 4   | 20"    | 20"    |
|   |                 |                                   | 4   | 25"    | 20"    |

| SUGGESTED COMPONENTS       |           |   |           |  |                                   |                                 |         |
|----------------------------|-----------|---|-----------|--|-----------------------------------|---------------------------------|---------|
| Exhaust Collar             |           | Supply Collar<br>(Built-in Fire Damper) |           | Standoff   | Incandescent Light<br>Fixture     | Shipping Crate                  |         |
| 16-Gauge Cold Rolled Build |           | 16-Gauge Cold Rolled Build              |           |  |                                   | Dimensions (in) and Weight (lb) |         |
| QTY                        | Size      | QTY                                     | Size      | <input type="checkbox"/> NONE<br><input type="checkbox"/> 3"<br><input type="checkbox"/> _____ | UL Listed<br>(Included Component) | Length:                         | 184"    |
| 1                          | 14" x 30" | 3                                       | 10" x 16" |  |                                   | QTY                             | Height: |
|                            |           |   |           |  | Weight:                           | 620 lbs                         |         |

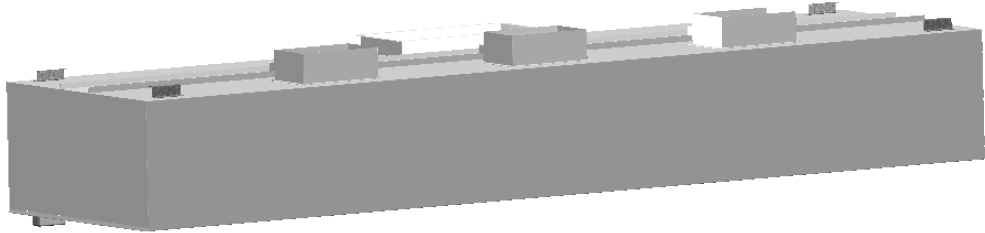

|  |           |   |            |      |             |
|--|-----------|---|------------|------|-------------|
| <br>PO BOX 47607 - ATLANTA, GA 30360<br>PHONE: 770.936.0770 - www.superiorhoods.com |           | PROJECT<br><b>BSSM48-15</b>                         |            |      |             |
|  |           | TITLE<br><b>BSSM HOOD MODEL STANDARD SPEC SHEET</b> |            |      |             |
| APPROVED   | SIZE<br>B | CODE  | DWG NO     |      | REV<br>01   |
| CHECKED  | DRAWN     |   | PRODUCTION | 2023 | SCALE: 1:35 |
| WEIGHT: 470 lbs  |           | SHEET: 1/1  |            |      |             |